

NETWORK



REVOLUTIONIZING THE FUTURE OF METAL CUTTING THROUGH INNOVATIVE SUSTAINABLE TECHNOLOGIES


"... Our products and services for metal cutting are transforming the future of digital factory by offering a wide range of solutions to improve the efficiency and automation of production processes: this holistic approach has actually consolidated Industry 4.0 standards and is helping to define the new horizons of Industry 5.0 through programming and management, control and monitoring software applications, exclusive cutting cycles and integration services."

MEP GROUP

We are specialized in the design and production of band and circular sawing machines for metal cutting that meet the most varied needs in the field of forming and chip removal of ferrous and non-ferrous materials.

Pioneer of digitalization in the sawing machine industry, the company has always attached the utmost importance to process automation in order to remain competitive in the market: **the wide range of sawing machines is made up of standard automation and digitalization solutions that can be enhanced with customized solutions according to customer needs.**

Moreover, as an all-round solutions provider, we offer not only cutting-edge sawing machines and integrated services, but also high-tech peripheral devices and innovative accessories.

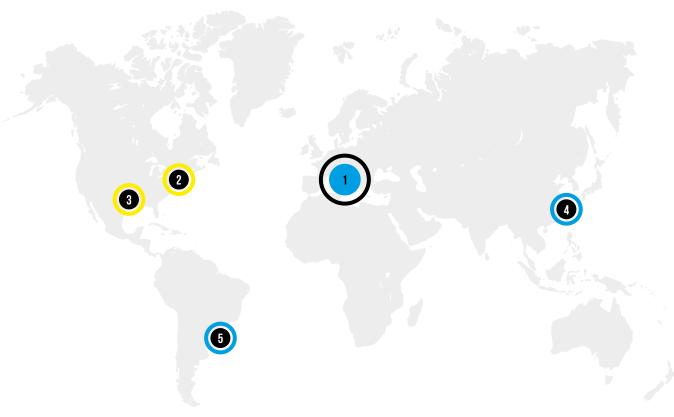



Woodstock, ON Canada



HYDMECH inc.

Conway, AR USA



MEP SPA

Pergola (PU) Italy



CO. LTD

Suzhou P.R. China



São Paulo - SP Brazil





Year of foundation



Headquarters in 4 continents



smq of production plant



Employees



Distributors and dealers



Countries to which our products are distributed



Sawing machines models



Material Handling System solutions



Customized solutions manufactured annually



Maximum cutting capacity (mm)



Machines manufactured annually



Euro annual turnover













"... Believing that digitalization is the key to remaining competitive in the market and improving the quality of products and services, our goal is to promote innovation and sustainable development by putting at the service of our customers solutions that integrate the knowledge gained during the digitalization process: actually, as part of our business strategy, we position ourselves as a pioneer in the digitalization of our processes and the continuous search for new technologies aimed at improving our efficiency, precision and productivity.

Digitalization, accelerated by the recent introduction of artificial intelligence, remains the beating heart of our operations, from the development and design of our products, to manufacturing and logistics, and we are convinced that the direct knowledge of digital technologies acquired through observation, use and daily practice is the differentiating element that allows us to perform best in the market by offering solutions suitable for every type of customer."

PRODUCTION PROCESS

The excellent cutting precision of MEP machines is largely due to their G25 cast iron frames, which are deburred and then blasted with steel shot prior to painting. To ensure maximum flexibility in production, a large number of these painted, cast iron frames are always kept in stock ready for machining.

Nearly all material is processed in MEP's three FMS machining centres. These are served from a single automated warehouse system capable of handling a large number of different parts uninterruptedly, even overnight, to ensure maximum flexibility in production.

Each machining centre has its own tool store and preset system to change tools whenever they no longer conform to the requirements of the machining program.


















A measuring system that operates at a controlled temperature samples the dimensions of machined parts to ensure constant uniformity. Once machined, cast iron parts are stored in a large warehouse ready for picking and assembly.

A dedicated department assembles all complex mechanisms and performs all adjustments and calibrations that require particular care. 10 assembly islands, each handling limited quantities at a time, are served by the high speed FMS machining centres and large castings store to ensure extremely flexible production and to reduce delivery times for almost 50 different models of sawing machine.

LEGEND

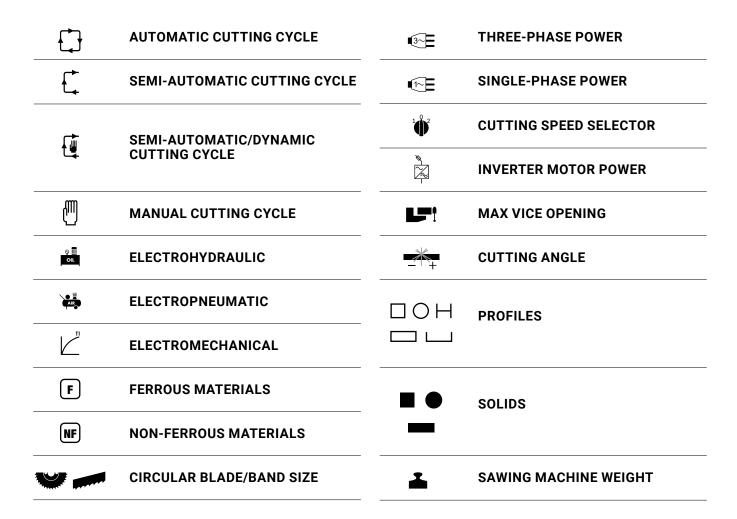

The manufacturer reserves the right to carry out modifications without notice.

The published photos may include non-standard details.





COBRA 352 NC 5.0

MITER CUTTING • LIGHT ALLOYS • TUBES • PROFILES • EXTRUDED
















COBRA 352 NC 5.0, electropneumatic automatic sawing machine with electrowelded hard-metal blade to cut light alloys, aluminium profiles and solids mitering from -45 $^{\circ}$ to +45 $^{\circ}$





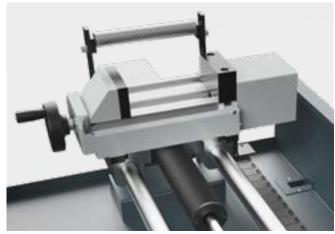

MAXIMUM PRODUCTION

- The cast-iron structure absorbs vibrations and ensures greater cutting stability and longer blade life.
- The control allowing to store up to 100 cutting programs, each one with different quantities and lengths, minimizes programming time of regular jobs.
- The automatic acquisition of the saw head cutting start position reduces setting time.
- The automatic coolant spray mist device, actived only when the cycle starts so as to avoid waste, ensures an excellent blade cooling and longer life.

MAXIMUM PRECISION

- The bar feeder powered by stepper motor is a guarantee of high precision.
- Angles scale engraved on the turning platform allows to easily perform precise cuts in perfect tolerance at any angle.
- The mechanical stops at -45°, 0° and +45° with locking device at all angles in between allow the precise positioning of the saw head.
- The clamping unit, which is equipped with both two front pneumatic vices freely positionable along the longitudinal axis of the pieces and a vertical vice, ensures an efficient and safe clamping even if case of tube cutting.



ADAPTATIVE SAW HEAD DOWN FEED RATE

Self-regulation in real-time of head down feed rate according to type of material or blade wear.




INDUSTRY 4.0 READY - IOT

The optional IOT allows to maximize data collection and use them in favor of a better sawing machine cutting performance and longer blade life.



TILTING HEAD

The sawing machine cuts light alloys, aluminium profiles and solids from -45° to $+45^{\circ}$. The saw head is vertically adjustable to also perfom cuts with head tilting from 0° to $+45^{\circ}$.

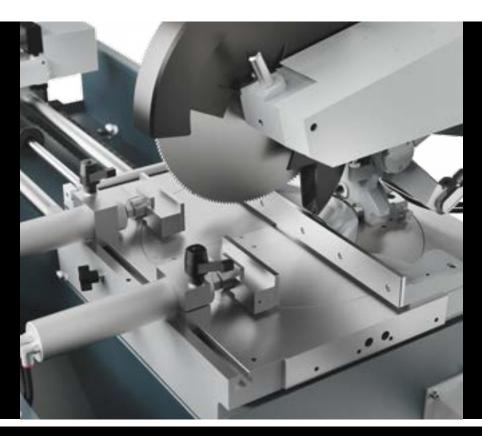

TURNING CUTTING TABLE

The turning cutting table is assembled on a central pin and thrust bearing thus allowing an easy and smooth rotation at any angle and turning along with the saw head thus preventing to cut it through.

OPTIONS FROM PAGE 84 - N° 02 - 03 - 06 - 10 - 14 - 15 - 31 - 46 - 47 - 48 - 56 - 62 - 63 - 71

| | | 1,0,2 | | + | 0 | | | | | |
|------------|----------------------|-----------|-----|------|-----|-----|--------|----|----------|--|
| | ■ 3~ E | Ф | | -45° | 120 | 100 | 135x60 | 55 | — | |
| mm | kW | rpm | mm | 0° | 120 | 105 | 180×70 | 80 | kg | |
| 350x32x3,4 | 2,6/3,5 | 1700/3400 | 180 | +45° | 110 | 95 | 135×60 | 55 | 600 | |





OPTIONS COBRA



OPTION N° 02

5 L emulsifiable oil pack




OPTION N° 14

Kit IoT Industry 4.0 Ready



OPTION N° 03

Spray mist system



OPTION N° 15

MePlan: Kit MES



OPTION N° 06

Circular blade TCT



OPTION N° 24

Pneumatic vertical vice



OPTION N° 09

Foot pedal control for vice (only MA)



OPTION N° 31

Adapter for unloading table



OPTION N° 10

Supplementary foot pedal control with emergency stop



OPTION N°39

Pneumatic vertical vice (only MA version)



OPTION N° 45

Set of comb jaws for bundle cutting max 70x70 mm



OPTION N° 59

Chip collector electrical connection



OPTION N° 46

Special vice to reduce remnant (max 220 mm)



OPTION N° 62

Chip collector Turbo 2500



OPTION N° 47

Set of nylon comb jaws max 75x75 mm



OPTION N° 63

Kit for double suction



OPTION N° 48

Set of nylon comb jaws (max 75x75 mm) for special vice to reduce remnant (to order only if combined with the vice to reduce remnant)



OPTION N°71

Roller conveyor KK200/1500 mm



OPTION N° 56

Roller conveyor KK200V/1500 mm Rollers inclined at 45° when machine equipped with bundle comb jaws

CONVEYORS FOR SAWING MACHINES

| | ADAP | | | KK IDI COI | ER R | | ₹ | | KK MOTORIZED ROLLER CONVEYORS | | | | | | |
|---------------------------|---------|-----------|-------|---------------|----------|--------|--------|--------|----------------------------------|--------|-------|--------|--------|-------|-------|
| | | | | | | | | | | со | NTRO | LA | со | NTRO | LB |
| | LOADING | UNLOADING | KK200 | KK330 | KK330 HD | KK 460 | KK 530 | KK 730 | KK 930 | KK 530 | KK730 | KK 930 | KK 530 | KK730 | KK930 |
| PH 211-1 | • | • | • | | | | | | | | | | | | |
| PH211-1 HB | • | • | • | | | | | | | | | | | | |
| PH 261-1 | • | • | | • | | | | | | | | | | | |
| PH 261-1 HB | • | • | | • | | | | | | | | | | | |
| PH 262 | • | • | | • | | | | | | | | | | | |
| PH 262 HB | • | • | | • | | | | | | | | | | | |
| SHARK 281 | | • | | • | | | | | | | | | | | |
| SHARK 281 CCS | | • | | • | | | | | | | | | | | |
| SHARK 281 CCS MA | | • | | • | | | | | | | | | | | |
| SHARK 281 SXI EVO | | • | | • | | | | | | | | | | | |
| SHARK 281 NC 5.0 | | • | | • | • | | | | | | | | | | |
| SHARK 282 | | • | | • | | | | | | | | | | | |
| SHARK 282 CCS | | • | | • | | | | | | | | | | | |
| SHARK 282 CCS MA | | • | | • | | | | | | | | | | | |
| SHARK 282 SXI EVO | | • | | • | | | | | | | | | | | |
| SHARK 332-1 CCS | | • | | • | | | | | | | | | | | |
| SHARK 332-1 SXI EVO | | • | | • | | | | | | | | | | | |
| SHARK 332-1 NC 5.0 | | • | | • | • | | | | | | | | | | |
| SHARK 331-1 NC 5.0 SPIDER | | • | | • | • | | | | | | | | | | |
| SHARK 382-1 SXI EVO | | • | | | | • | • | | | • | | | • | | |
| SHARK 452-1 SXI EVO | • | • | | | | • | • | | | • | | | • | | |
| SHARK 230-1 NC HS 5.0 | | | | • | • | | | | | | | | | | |
| TIGER 352 | | • | • | | | | | | | | | | | | |
| TIGER 352 MA | | • | • | | | | | | | | | | | | |
| TIGER 352 SX EVO | | • | • | | | | | | | | | | | | |
| TIGER 352 NC 5.0 | | • | • | | | | | | | | | | | | |
| TIGER 372 SX EVO | | • | • | | | | | | | | | | | | |
| COBRA 352 MA | | • | • | | | | | | | | | | | | |
| COBRA 352 SX EVO | | • | • | | | | | | | | | | | | |
| COBRA 352 NC 5.0 | | • | • | | | | | | | | | | | | |
| FALCON 352 | | • | • | | | | | | | | | | | | |
| FALCON 352 MA | | • | • | | | | | | | | | | | | |

OPTIONS IDLER CONVEYORS

| | | VERTICAL ROLLER | SET OF VERTICAL ROLLERS | TWO SETS OF VERTICAL ROLLERS | HEAVY-DUTY VERTICAL ROLLER | ADJUSTABLE VERTICAL ROLLER | HYDRAULIC SQUARING VICE | TRAY COOLANT RECOVERY | ADDITIONAL SUPPORT | SAFETY FILLER PLATES | STAGING SKIDS | MEASURING STOP DEVICE R1 | MEASURING STOP DEVICE R2 | MEASURING STOP DEVICE R3 | MEASURING STOP DEVICE R4 | MEASURING STOP DEVICE FLASH | CHAIN CROSS TRANSFER | TRUCK & TROLLEY CROSS TRANSFER | ARROW (M, S, A) | BLAZE (S, A) |
|----------------|-------------|-----------------|-------------------------|------------------------------|----------------------------|----------------------------|-------------------------|-----------------------|--------------------|----------------------|---------------|--------------------------|--------------------------|--------------------------|--------------------------|-----------------------------|----------------------|--------------------------------|-----------------|--------------|
| | DLER ROLLER | CON | IVEY | OK |) | | | | | | | | | | | | | | | |
| KK 200 | | | | | | | | | • | | | • | • | • | | | | | | |
| KK 330 | | | • | • | | | | | • | | | • | • | • | | | | | • | |
| KK 460 KK330HD | | | • | | | | | | | | | | | | | | | | • | |
| KK 460 | | | • | • | | | | | • | | | | • | • | | | | | • | |
| KK 530 | M | • | | | • | • | • | • | | • | • | | | | • | • | • | • | | • |
| KK 730 | M | • | | | • | • | • | • | | • | • | | | | • | • | • | • | | • |
| KK 930 | M | • | | | • | • | • | • | | • | • | | | | • | • | • | • | | • |

• suitable

TECHNICAL SPECIFICATIONS

| | Rest piece no longer feeded standard (mm) | Minimum cutting length (mm) | Cutting capacity with overhead bundling (mm) | Speed of feeding vice (m/min) | Max. weight that the feeding vice can pull (kg) | Working table height (mm) |
|---------------------------|--|--------------------------------|--|----------------------------------|--|------------------------------|
| PH 211/1 | - | - | - | - | - | 935 |
| PH 211/1 - HB | - | - | - | - | - | 935 |
| PH 261/1 | - | - | - | - | - | 950 |
| PH 261/1 - HB | _ | - | _ | - | - | 950 |
| PH 262 | - | - | - | - | - | 950 |
| PH 262 - HB | - | - | - | - | - | 950 |
| | | | | | | |
| SHARK 281 | - | - | - | - | - | 860 |
| SHARK 281 CCS/MA | - | - | - | - | - | 860 |
| SHARK 281 SXI evo | - | - | - | - | - | 857 |
| SHARK 281 NC 5.0 | 260 | 10 | 170x130 | 4 | 1360 | 870 |
| SHARK 282 | - | - | - | - | - | 870 |
| SHARK 282 CCS/MA | - | - | - | - | - | 870 |
| SHARK 282 SXI evo | - | - | - | - | - | 861 |
| SHARK 331-1 NC 5.0 SPIDER | 210 | 10 | 320x150 | 4 | 1360 | 900 |
| SHARK 332-1 CCS | - | - | - | - | - | 870 |
| SHARK 332-1 SXI evo | - | - | - | - | - | 870 |
| SHARK 332-1 NC 5.0 | 400 | 10 | 320×160 | 4 | 1360 | 870 |
| SHARK 382-1 SXI evo | - | - | - | - | - | 870 |
| SHARK 452-1 SXI evo | - | - | - | - | - | 880 |
| SHARK 230-1 NC HS 5.0 | 85 | 10 | 230x230 | 4 | 1360 | 870 |
| TIGER 352/MA | - | - | - | - | - | 940 |
| TIGER 352 SX evo | - | - | - | - | - | 950 |
| TIGER 352 NC 5.0 | 320 | 10 | 70×70 | 4.5 | 1360 | 950 |
| TIGER 372 SX evo | - | - | - | - | - | 950 |
| FALCON 352 | - | - | - | - | - | 970 |
| FALCON 352 MA | - | - | - | - | - | 970 |
| COBRA 352 MA | - | - | - | - | - | 920 |
| COBRA 352 SX evo | - | - | - | - | - | 925 |
| COBRA 352 NC 5.0 | 385 | - | 75x75 | 4.6 | 1360 | 940 |

| Capacity of the coolant tank (Lt) | Capacity of the hydraulic tank (Lt) | Blade length (mm) | Max. sawing machine sizes (mm) | Packing size (mm) |
|--------------------------------------|--|---------------------|-----------------------------------|--------------------|
| 10 | - | 2130 ±20 X 20 X 0.9 | 1510 X 645 | 800 X 1400 X 1650 |
| 10 | - | 2130 ±20 X 20 X 0.9 | 1510 X 645 | 800 X 1400 X 1650 |
| 15 | - | 2450 ±20 X 20 X 0.9 | 1725 X 715 | 800 X 1400 X 1650 |
| 15 | - | 2450 ±20 X 27 X 0.9 | 1725 X 715 | 800 X 1400 X 1650 |
| 15 | - | 2450 ±20 X 27 X 0.9 | 1580 X 710 | 800 X 1400 X 1650 |
| 15 | - | 2450 ±20 X 27 X 0.9 | 1580 X 710 | 800 X 1400 X 1650 |
| | | | | |
| 22 | _ | 2950 ±20 X 27 X 0.9 | 1785 X 800 | 1000 X 1700 X 1650 |
| 22 | - | 2950 ±20 X 27 X 0.9 | 1785 X 800 | 1000 X 1700 X 1650 |
| 13 | 2.5 | 2950 ±20 X 27 X 0.9 | 2000 X 1000 | 1000 X 1700 X 1840 |
| 120 | 35 | 2950 ±20 X 27 X 0.9 | 2460 X 2230 | 1960 X 2190 X 2030 |
| 13 | - | 2950 ±20 X 27 X 0.9 | 1800 X 900 | 1000 X 1700 X 1650 |
| 13 | - | 2950 ±20 X 27 X 0.9 | 1800 X 900 | 1000 X 1700 X 1650 |
| 13 | 2.5 | 2950 ±20 X 27 X 0.9 | 1650 X 1150 | 1000 X 1700 X 1840 |
| 100 | 35 | 3650 ±20 X 27 X 0.9 | 1900 X 1860 | 2040 X 2020 X 1740 |
| 80 | - | 3650 ±20 X 27 X 0.9 | 2155 X 1210 | 1300 X 2200 X 1950 |
| 60 | 2.5 | 3650 ±20 X 27 X 0.9 | 2250 X 1400 | 1300 X 2000 X 1950 |
| 120 | 35 | 3650 ±20 X 27 X 0.9 | 2720 X 2324 | 2030 X 2300 X 2150 |
| 60 | 2.5 | 3770 ±20 X 27 X 0.9 | 2250 X 1400 | 1300 X 2000 X 1950 |
| 80 | 2.5 | 4500 ±20 X 34 X 1.1 | 3300 X 1660 | 2040 X 2280 X 1800 |
| 95 | 33 | 2950 ±20 X 27 X 0.9 | 1655 X 1864 | 1800 X 2080 X 2100 |
| 20 | - | HSS 350 X 32 X 2.5 | 960 X 1040 | 950 X 1000 X 1870 |
| 20 | - | HSS 350 X 32 X 2.5 | 1140 X 1035 | 1050 X 1120 X 2050 |
| 20 | - | HSS 350 X 32 X 2.5 | 2150 X 1300 | 1200 X 1920 X 2200 |
| 80 | - | HSS 370 X 32 X 3.0 | 1400 X 1490 | 1240 X 1480 X 2150 |
| 42 | _ | HSS 350 X 32 X 2.5 | 860 X 1170 | 830 X 920 X 880 |
| 42 | - | HSS 350 X 32 X 2.5 | 860 X 1170 | 830 X 920 X 1500 |
| | | | | |
| 1/10 | - | HM 350 X 32 X 3.4 | 850 X 1230 | 700 X 1000 X 1700 |
| 1/10 | - | HM 350 X 32 X 3.4 | 1700 X 1510 | 1200 X 1450 X 1800 |
| 1/10 | - | HM 350 X 32 X 3.4 | 2360 X 1700 | 1650 X 2200 X 2150 |







SERVICE & SUPPORT

The Mep After Sale Service supports Customers with a range of services that for years have been one of the Company's excellence.



SPARE PARTS

Our technical staff is always ready to guarantee you the best assistance in the identification of the spare parts, even for machines out of production, and shipping by the fastest couriers within 24-72 hours after placing the order

Moreover, storage and modern logistics ensure that our spare parts warehouse is constantly optimized in order to guarantee maximum availability.



MAINTENANCE PLANS

A regular maintenance has several benefits: less frequent failures and breakages, longer life of the sawing machine and its parts, more efficient system.

Find out which maintenance plan is the most suitable for your production needs or check if the maintenance KIT suitable for your sawing machine is available. Maximize efficiency to avoid any unpleasant events! Prevent expensive downtime by relying on the experience of our after sale service team.



TRAINING PLANS

Conceived for your MEP sawing machines or cutting lines: these cutting-edge courses are oriented to customers and workshop practice and they are about notions and practice directly on the machine!

Stand out from the competion by taking full advantage of the potential of your sawing machine!

OUR EXPERIENCE AND SUPPORT TO GRANT YOUR EFFICIENCY, ALWAYS!

OVERHAUL

Restore the efficiency of your sawing machine by improving productivity, cutting precision and safety.



INTEGRATIONS AND OPTIMIZATIONS

Upgrades to enhance the software version in use, along with the integrations needed to connect its parts with other systems, maximize the efficiency of your workshop by making the most of its potential.

AFTER SALES PROGRAM

Given the primary importance of Customer Satisfaction, particular attention has been paid to the management of the After Sales Service by a highly specialized internal staff that constantly interacts with quality control, Authorized **Customer Service Centres, Sales Office** and End Customers.



IN THE MUSEUM OF OUR CITY THE ONLY GROUP OF GOLDEN BRONZE STATUS IN THE WORLD



MEP SPA SOCIO UNICO

Via Enzo Magnani, 1 - 61045 PERGOLA (PU) ITALY Tel. (+39) 0721 73721 - Fax (+39) 0721 734533 R. Imprese, C.F. e P. IVA n°13051480153 Cod. EORI IT13051480153 REA PS 164639 Capitale Sociale € 10.372.791,00 int. vers. Pec: mepspa@mepsaws.legalmail.it