


# SHARK 281

SHARK 281, manual pull down band saw machine to cut from 0° to +60°.

#### FEATURES:


- Electric panel (wiring totally identifiable, stand-by, loose-key safety switch, main switch, pole change switch, emergency stop, motor magneto-thermal overload, minimum tension coil, protection against missing phase, low tension safety device (LTSD 24 V).
- IP55 control handle.
- Structure in grey cast iron g25, reducing drastically vibrations, grant a better stability and longer blade life.
- Vice with fast clamping device.

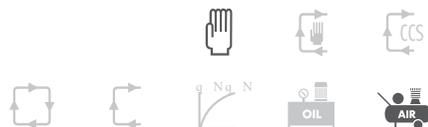



- Hydraulic transducer to visualize band tensioning.
- Electric pump for band lubrication and cooling.
- Wire chip brush for band cleaning.
- Double head return spring.
- Adjustable measuring stop device to make cuts of the same length displayed on a millimeter scale.
- Stock support arm with roller predisposed to mount loading table.
- Bi-metal band saw blade for solids and profiles.
- Service keys and instructions manual for maintenance and spare parts list.
- The CUT CONTROL SYSTEM (CCS) can be retrofitted on machines out in the field.



SHARK 281/281CCS

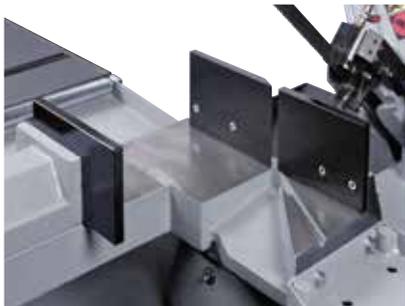

SHARK 281/281CCS



OPTIONALS FROM PAG 47 - N° 02-03-04-07-09-12-16-34-57-72-80

| mm          | kW      | m/min | mm  | 0°   | 250 | 230 | 280x200 | kg  |
|-------------|---------|-------|-----|------|-----|-----|---------|-----|
|             |         |       |     | +45° |     |     |         |     |
| 2950x27x0,9 | 1,5/1,8 | 36/72 | 285 | +60° | 120 | 110 | 110x110 | 375 |